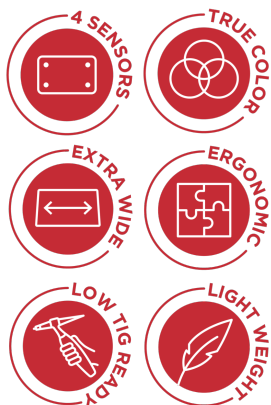


HELLMET DEVIL

Ref. 06772

 **SOLTER**


The **HELLMET R-10 DEVIL** welding screen from Solter combines innovation and quality to provide maximum eye protection for the most demanding welders. Designed with cutting-edge **True Color** technology, this screen ensures visual clarity, comfort, and superior performance in all types of welding tasks, including MMA, MIG/MAG, and TIG. It is the ideal companion for professionals seeking precision, safety, and durability.

Main Features:

- **True Color technology and 1/1/1/1 optical quality:** Provides true colors and a distortion-free, glare-free visual experience, CE certified.
- **Wide viewing area and intelligent detection:** Window of **100x60 mm** and **4 sensors ensuring constant activation** of the filter, preventing dark spots.
- **Versatile adjustment:** External adjustment of **DIN 5-8 and 9-13**, with sensitivity and delay control (0.1-1.0 seconds), plus a **grinding mode at DIN 4**.
- **Dual power and ergonomic design:** Solar power and replaceable CR2450 battery, with a **comfortable 4-point harness** for long work sessions.
- **Lightweight and compliant with strict regulations:** **Only 570 g**, compatible with optional accessories, and certified according to (EU) 2016/425, EN175:1997, and EN379:2003+A1:2009 standards.

The **HELLMET R-10 DEVIL** welding screen is ideal for ensuring maximum eye protection and visual precision in **MMA, MIG/MAG, and TIG** tasks, optimizing your safety and professional performance.

Trust Solter welding products to achieve precision, durability, and professional results. The **HELLMET R-10 DEVIL** welding screens are designed to maximize the performance of your projects with the quality and innovation of a leading brand in the industry.

HELLMET DEVIL

Ref.06772



TECHNICAL DATA

Generals	
Regulations	(UE) 2016/425 - EN175:1997 - EN379:2003+A1:2009
Segment	Professional
Segment	Professional
Technical	
Optics quality	CE 1/1/1/1
Viewing area	100x60mm
Filter dimensions	110x90mm
Energy	Solar y Batería CR2450 reemplazable
Grinding function	DIN 4 (externo)
External polycarbonate	115x104mm
Sensitivity	Si (externo)
Sensors	4
Reaction time	1/30000s
Delay time	0,1 - 1,0s
Clear shace	5/8
Darck shade	9/13
Structural	
Weight	570 g

OPTIONAL ACCESSORIES

Ref. 05863

HELLMET R-05 / R-10 HARNESS



Ref. 10088

POLYCARBONATE EXTERIOR PROTECTOR 115x104 mm (5 pcs.)



Ref. 10089

POLYCARBONATE INTERIOR PROTECTOR 100x63 mm (5 pcs.)



Ref. 73085

SWEATSHIRT 230x90mm OPTIMATIC

